


PLOUGHS



BEAM PLOUGH

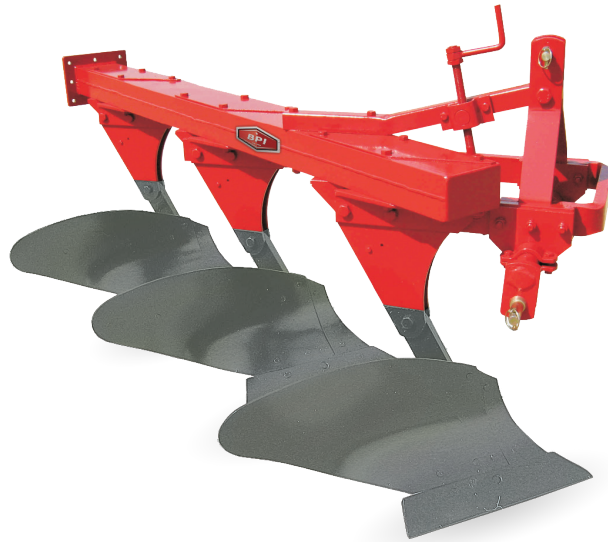

Super Value



Adjustable Spacing



Three-point Linkage

This is a three-point mounted beam type Mouldboard Plough, built to operate with great efficiency even under the most arduous conditions. Shear-bolt protection on the shears provide a safeguard should underground obstruction be encountered during operation. The 3- and 5-shear models are standard. A 1-shear extension is optional for 4-shear models. Ploughs have a 400 - 450mm cutting width.

STOCK CODE	A040A01	A040A02	A040L03	A040M03
FURROWS	3	3	5	5
SHEAR LENGTH	400mm	450mm	450mm	400mm
REQUIRED POWER	45 - 70kW	55 - 70kW	55 - 100kW	65 - 100kW
WEIGHT	425kg	425kg	500kg	500kg
EXTENSIONS	A040B01	A040B02		
FURROWS	1	1		
SHEAR LENGTH	400mm	450mm		

Manufacturer reserves the rights to change the above without any notice.